


	A
CB.16	1/2"G
CB.16-1	1/2"G
CB.25	3/4"G

CB.16									
50Hz	0,6	16	(1~) 0,66 (3~) 0,55	1400	63	55+60	1/2"G	1/2"G	(1~) 29,5 (3~) 27,5
60Hz	0,6	19	(1~) 0,72 (3~) 0,66	1700	65	60+65	1/2"G	1/2"G	(1~) 29,5 (3~) 27,5
CB.16-1									
50Hz	1,0	16	(1~) 0,75 (3~) 0,75	1400	63	55+60	1/2"G	1/2"G	(1~) 29,5 (3~) 29
60Hz	1,0	19	(1~) 0,90 (3~) 0,90	1700	65	60+65	1/2"G	1/2"G	(1~) 29,5 (3~) 29
CB.25									
50Hz	0,6	25	(1~) 0,75 (3~) 0,75	1400	65	65+70	3/4"G	1/2"G	(1~) 29 (3~) 28,5
60Hz	0,6	29	(3~) 0,75 (3~) 0,90	1700	67	70+75	3/4"G	1/2"G	(1~) 29 (3~) 28,5



NOTE Graph shows 1013mbar (Abs.) pressure at a temperature of 20°C (tolerance ±10%).
HINWEIS Die Kurven beziehen sich auf einen Druck von 1013 mbar (Abs.) und einer Temperatur von 20°C (Toleranz ±10%).

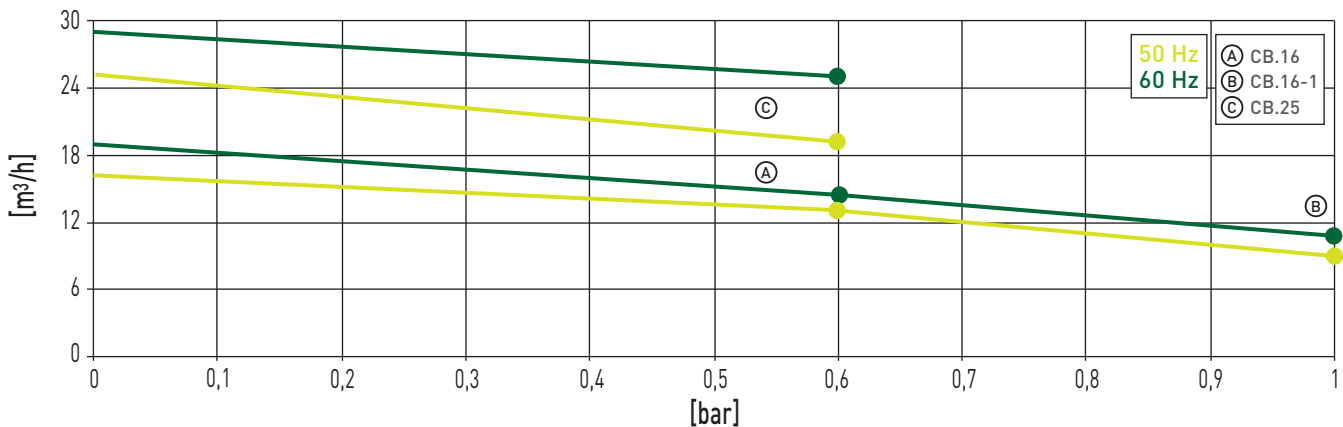

A-1220 Wien, Steinbrechergasse 32-34
 Tel.:0043/1/2048040, Fax:0043/1/2025700, E-mail: csk.at@iks-group.com

EIN UNTERNEHMEN DER IKS-GRUPPE