
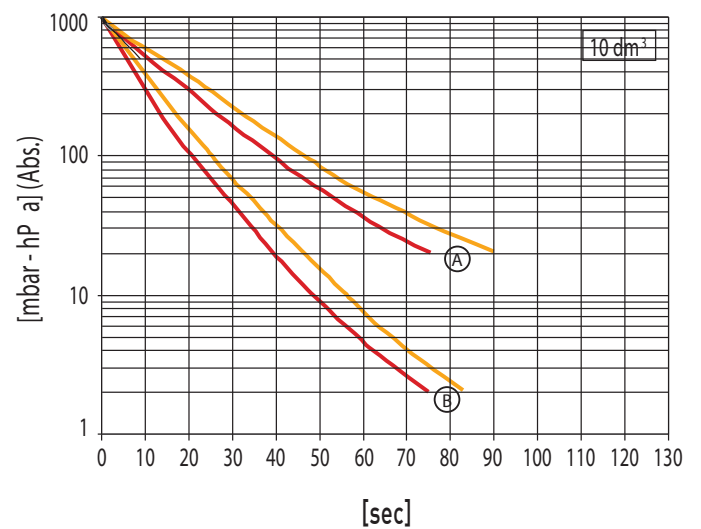


LC.2									
50Hz	10	2	(1~) 0,12 (3~) 0,12	2800	48	50+55	BV32 (SW40) dm ³ 0,06	Ø9	5,4
60Hz	10	2,5	(1~) 0,15 (3~) 0,15	3300	52	55+60	BV32 (SW40) dm ³ 0,06	Ø9	5,4
LC.4									
50Hz	2	4	(1~) 0,12 (3~) 0,12	2800	48	50+55	BV32 (SW40) dm ³ 0,06	Ø9	5,4
60Hz	2	4,4	(1~) 0,15 (3~) 0,15	3300	52	55+60	BV32 (SW40) dm ³ 0,06	Ø9	5,4

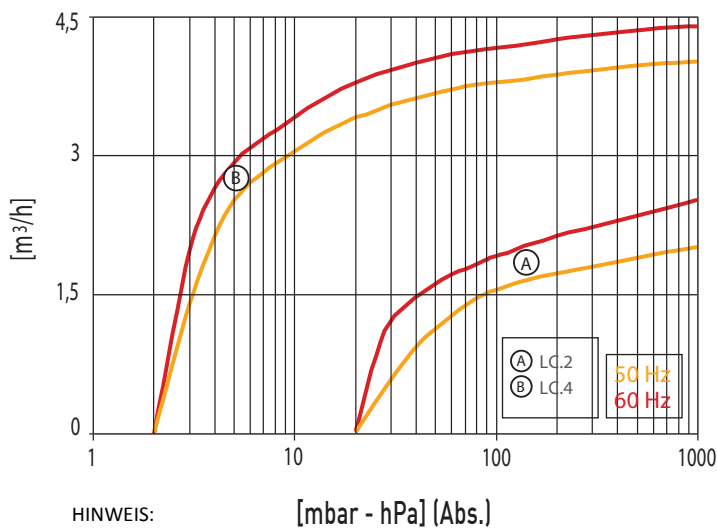

HINWEIS:

[mbar - hPa] (Abs.)

[sec]

Die Kurven beziehen sich auf einen Eingangsdruck und einer Temperatur von 20°C (Toleranz ±10%).

Dieses Model ist auch mit Motor in Effizienzklasse IE2 erhältlich

NOTE:

Graph shows inlet pressure at a temperature of 20°C (tolerance ±10%).

Model available also with IE2 efficiency class motor



A-1220 Wien, Steinbrechergasse 32-34

Tel.:0043/1/2048040, Fax:0043/1/2025700, E-mail: csk.at@iks-group.com

EIN UNTERNEHMEN DER IKS-GRUPPE