
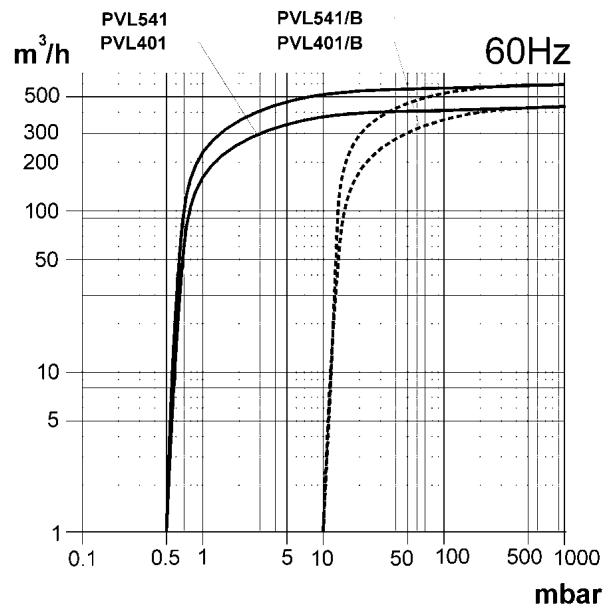


PVL 401											
50Hz	0,5	30	8	403	(3~) 7,5	1500	78	80÷85	BV100 (SW100) dm ³ 10	3"G	319
60Hz	0,5	30	8	484	(3~) 11,0	1800	79	85÷90	BV100 (SW100) dm ³ 10	3"G	363

PVL 401/B											
50Hz	10	30	8	403	(3~) 7,5	1500	78	80÷85	BV100 (SW100) dm ³ 10	3"G	319
60Hz	10	30	8	484	(3~) 11,0	1800	79	85÷90	BV100 (SW100) dm ³ 10	3"G	363

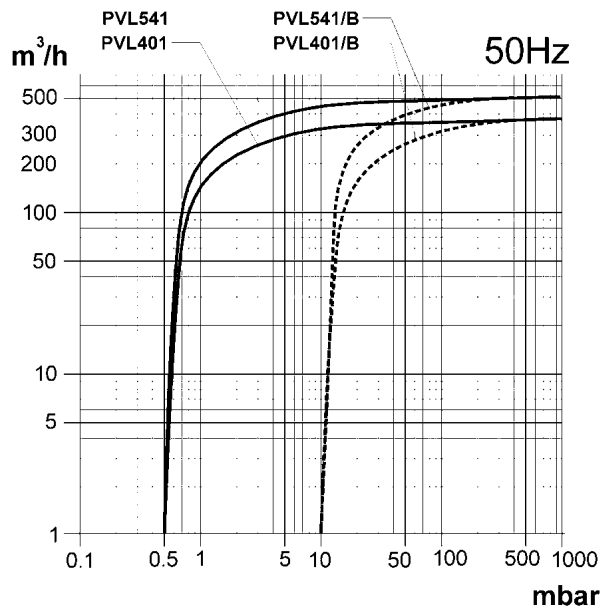

NOTE Graph shows inlet pressure at a temperature of 20°C (tolerance ±10%).
HINWEIS Die Kurven beziehen sich auf einen Eingangsdruck und einer Temperatur von 20°C (Toleranz ±10%).

NOTE Pump also available without motor. - Data relates to the model with the TX series motor.
HINWEIS Pumpe auch ohne Motor lieferbar. - Die Daten beziehen sich auf das Model mit TX- Motoren .



A-1220 Wien, Steinbrechergasse 32-34
 Tel.:0043/1/2048040, Fax:0043/1/2025700, E-mail: csk.at@iks-group.com

EIN UNTERNEHMEN DER IKS-GRUPPE