



LC.25

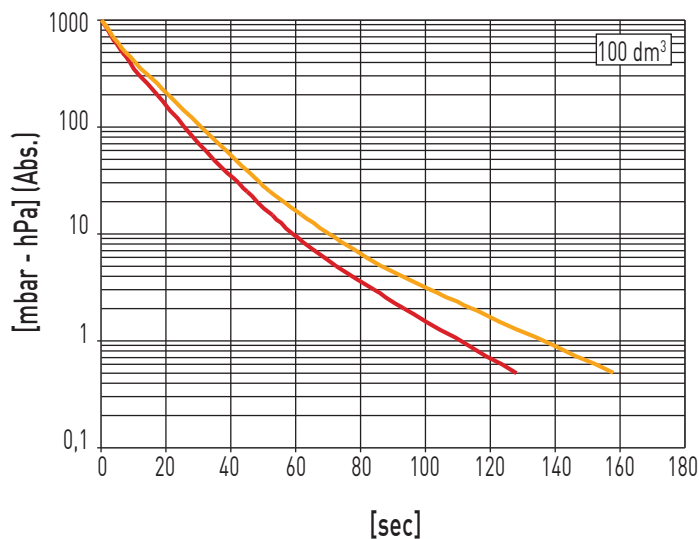

50Hz	0,5	40	0,7	25	(1~) 0,75 (3~) 0,75	1400	57	80÷85	BV68 (SW60) dm ³ 0,7-1	1/2" G	(1~) 26 (3~) 25
60Hz	0,5	40	0,7	29	(1~) 0,90 (3~) 0,90	1700	59	85÷90	BV68 (SW60) dm ³ 0,7-1	1/2" G	(1~) 26 (3~) 25

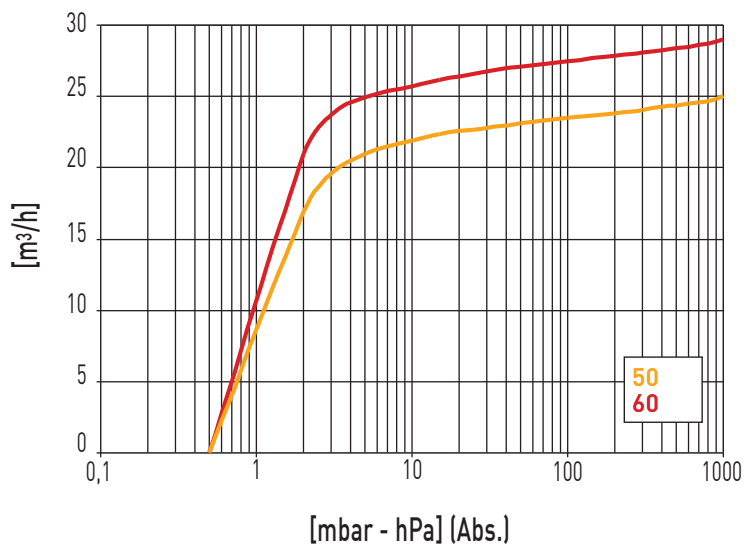

NOTE Graph shows inlet pressure at a temperature of 20°C (tolerance ±10%).

HINWEIS Die Kurven beziehen sich auf einen Eingangsdruck und einer Temperatur von 20°C (Toleranz ±10%).

NOTE Model available also with efficiency class motor.

HINWEIS Dieses Modell ist auch mit Motor in Effizienzklasse erhältlich.



A-1220 Wien, Steinbrechergasse 32-34
Tel.:0043/1/2048040, Fax:0043/1/2025700, E-mail: csk.at@iks-group.com

EIN UNTERNEHMEN DER IKS-GRUPPE