



LC.40-WR											
50Hz	4	50	1,3	40	(3~) 1,1	1400	64	75+80	BV68 (SW60) dm³ 1,1-1,7	1 1/2"G	(3~) 42
60Hz	4	50	1,3	48	(3~) 1,35	1700	66	80+85	BV68 (SW60) dm³ 1,1-1,7	1 1/2"G	(3~) 42
LC.60-WR											
50Hz	4	50	2,4	60	(3~) 1,5	1400	66	80+85	BV68 (SW60) dm³ 1,1-1,7	1 1/2"G	(3~) 44
60Hz	4	50	2,4	72	(3~) 1,8	1700	68	85+90	BV68 (SW60) dm³ 1,1-1,7	1 1/2"G	(3~) 44

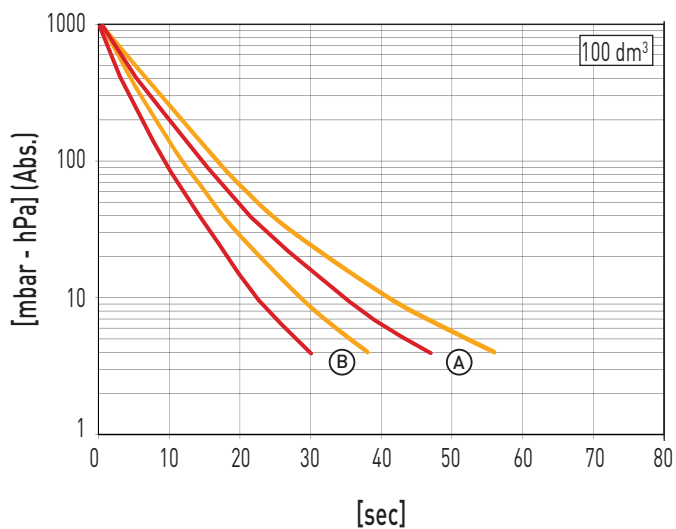

NOTE Graph shows inlet pressure at a temperature of 20°C (tolerance ±10%).
HINWEIS Die Kurven beziehen sich auf einen Eingangsdruck und einer Temperatur von 20°C (Toleranz ±10%).

NOTE Model available also with efficiency class motor.
HINWEIS Dieses Modell ist auch mit Motor in Effizienzklasse erhältlich.

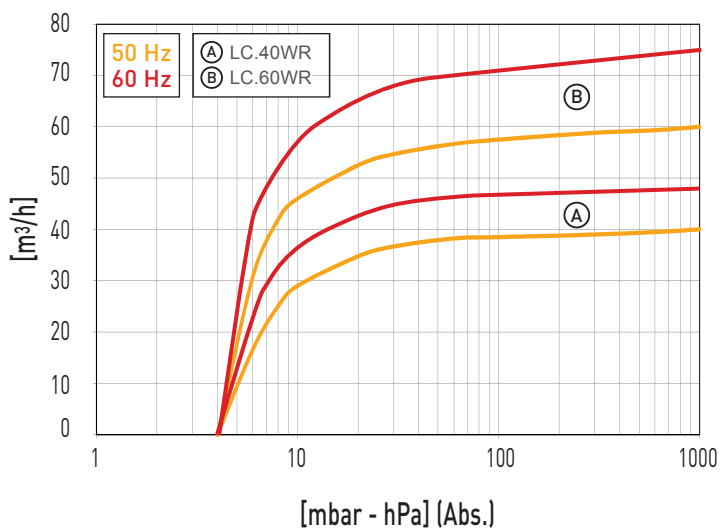

A-1220 Wien, Steinbrechergasse 32-34
 Tel.:0043/1/2048040, Fax:0043/1/2025700, E-mail: csk.at@iks-group.com

EIN UNTERNEHMEN DER IKS-GRUPPE